



中分双开扇平门机
D-Leafs center opening VVVF door operator

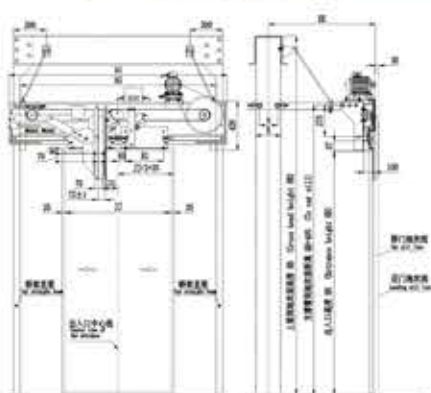

JK	750	750	900	900	900	900	1050	1050	1100	1200
A1	1400	1500	1600	1700	1800	1900	2000	2100	2200	2400
B1	220	220	215	200	205	200	215	200	210	210


A0 根据轿厢导轨的宽度尺寸确定
 Based on the floor clearance of straight track in car frame
 A1 根据轿厢导轨的宽度尺寸确定
 Based on the width of the car frame
 A2 根据用户要求确定
 Based on the requirement
 A3 根据用户要求确定
 Based on the requirement
 安装方法: 参照安装手册, 参照安装
 Installation methods see from Installation manual for particular

中分扇门装置
D-Leafs center opening landing device

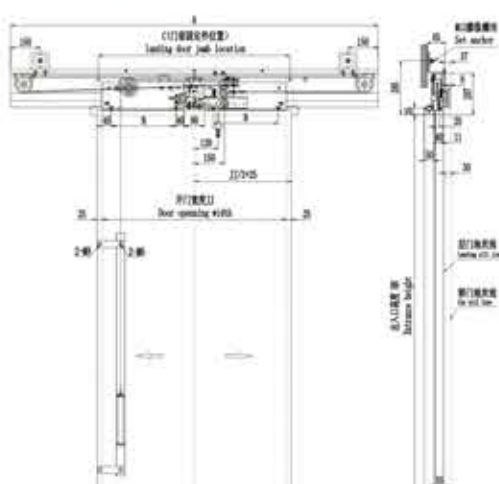

JK	750	750	900	900	900	1050	1050	1100	1200
A	1400	1500	1600	1700	1800	1900	2000	2100	2400
B	220	220	215	200	205	200	215	200	210
C	760	630	600	620	600	620	600	620	600


旁开扇平门机
E-Leafs side opening VVVF door operator

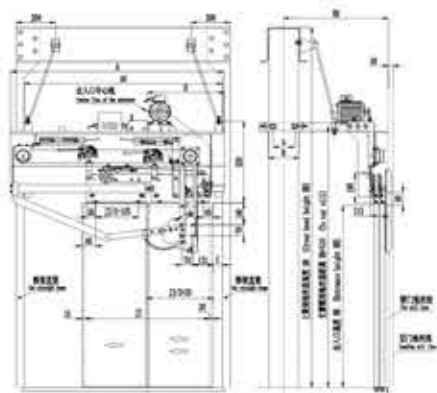

JK	750	800	900	1000	1100	1200	1400	1600
B	400	400	340	300	300	300	300	300
A	1710	1610	1510	1410	1310	1210	1110	1010

C 根据用户要求确定在轿厢内表面与轿门边缘之间的距离
 Based on the user's requirement to determine the distance between the inner surface of the car frame and the door edge
 A0 根据轿厢导轨的宽度尺寸确定
 Based on the floor clearance of straight track in car frame
 A1 根据轿厢导轨的宽度尺寸确定
 Based on the width of the car frame
 A2 根据用户要求确定
 Based on the requirement

旁开双折扇门装置
E-Leafs side opening landing device

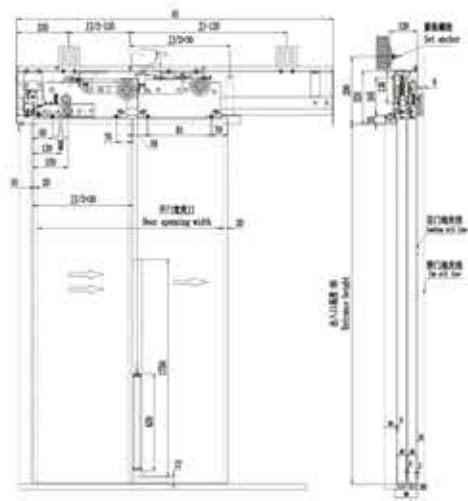

JK	1200	1200	1200	1200	1200	1200	1200	1200
A	1210	1200	1210	1200	1210	1200	1210	1200
B	220	210	200	190	180	170	160	150

尺寸单位: mm

手拉式别墅电梯门
Swing Door



SX-0901 手拉式别墅电梯门
Swing Door




SX-0902 别墅电梯门锁装置
Door Lock



SX-0903 别墅楼道门闭门器
Door Closer



SG-099 闭门器
Door Closer

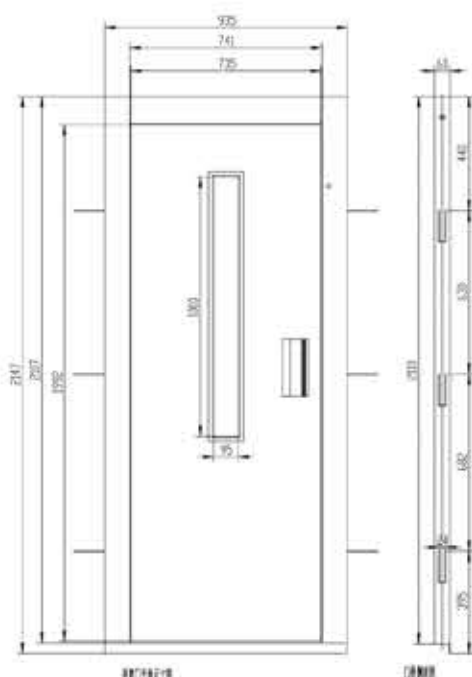

门框尺寸图

门扇图

