



CNIM handrail chain



Kone Newel Roller



Kone Return Guide



Kone Return Guide



Kone Newel Roller



OTIS XIZlotis Newel Chain



Schinlser Newel Chain



Schinlser 9300 Reversing Chain



Thyssen Newel Chain



CNIM Step chain




Kone Step chain



Kone Step chain



Kone chain Link

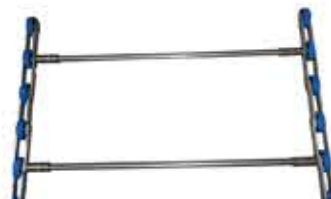

OTIS Step chain



OTIS Step chain



OTIS Step chain Link



OTIS Step chain Link



Schinlser Step Chain Link



Schinlser Step Chain Link



Schinlser SWE Step Chain



Schinlser Step Chain



Thyssen Step Chain



Hitachi Step Chain



OTIS Handrail Roller Group



OTIS Handrail Support Chain



OTIS XIZlotis Handrail Support Chain



Thyssen Newel Guide



OTIS 606 NCT Pallet Drive Chain



Schinlser 9300 Handrail Drive Chain







Mitsubishi Handrail Chain



扶梯驱动链


Escalator Driving Chain

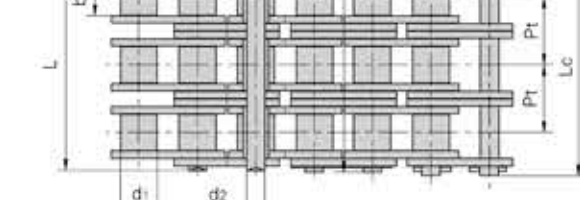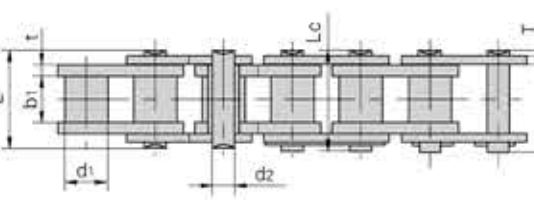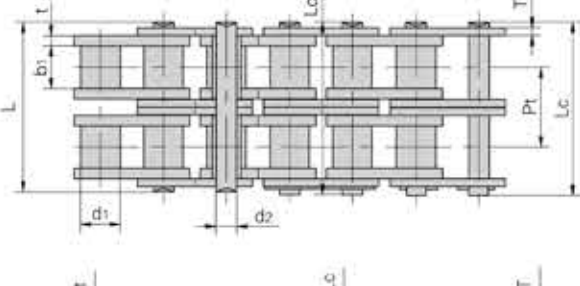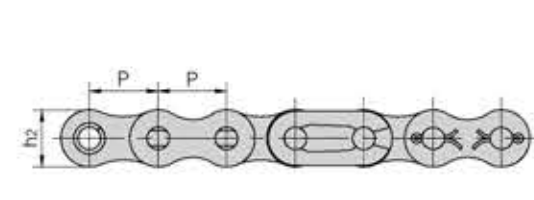

链号 Model	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	内链板高度 Inner plate depth	链板厚度 Plate thickness	排距 Transverse pitch	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter	
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t/T max	Pt	Q min	Qo	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
16A-2	25.40	15.88	15.75	7.92	62.7	64.3	24.00	3.25	29.29	113.40/25493	141.8	5.15
16AFT-2	25.40	15.88	15.75	7.92	62.7	65.8	24.00	3.25	29.29	132.3/29742	165.4	5.51
16B-1	25.40	15.88	17.02	8.28	36.1	37.4	21.00	4.15/3.10	-	60.0/13488	72.8	2.71
16B-2	25.40	15.88	17.02	8.28	68.0	69.3	21.00	4.15/3.10	31.88	106.0/23829	133.0	5.42
20A-2	31.75	19.05	18.90	9.53	76.4	80.5	30.00	4.00	35.76	177.00/39791	219.4	7.80
20AFT-2	31.75	19.05	18.90	9.53	76.4	80.5	30.10	4.00	35.76	211.68/47587	262.5	8.09
20A-3	31.75	19.05	18.90	9.53	112.2	116.3	30.00	4.00	35.76	265.5/59686	309.6	11.77
20AFT-3	31.75	19.05	18.90	9.53	112.2	116.3	30.10	4.00	35.76	330/74186	395.0	12.10
24A-2	38.10	22.23	25.22	11.10	95.8	99.7	35.70	4.80	45.44	254.00/57101	314.9	11.70
24B-2	31.75	19.05	19.56	10.19	114.2	117.9	26.40	4.50/3.50	36.45	280.0/62046	290.0	10.82
24B-2	38.10	25.40	25.40	14.63	101.7	106.2	33.20	4.50/3.50	48.36	250.0/56296	319.2	13.40
100SLR-2	31.75	19.05	18.90	9.53	76.4	80.5	30.00	4.00	35.76	173.4/39399	190.0	7.89
16BSLR-2	25.40	15.88	17.02	8.28	68.0	69.3	21.00	4.15/3.10	31.88	106.0/23829	133.0	5.42



扶梯梯级链 Escalator Step Chain

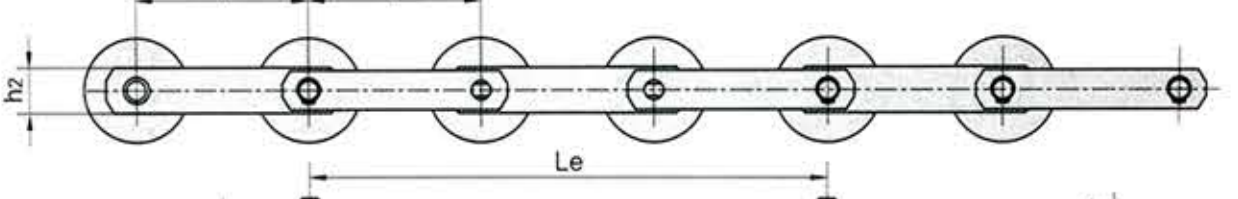

链号: Model	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	内链板高度 Inner plate depth	链板厚度 Plate thickness	梯级距(3节) Distance between steps (three pitches)	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每梯级长重 Weight per step
	P	d1 max	b1 min	d2 max	L max	h2	t/T max	Le	Q min	Q0	Q
	mm	mm	mm	mm	mm	mm	mm	mm	KN/LB	KN	Kg
ESCH-1	131.33	80.00	27.0	24.00	54.5	50.0	5.0	394.00	180.0/40465	198.00	3.700
ESCH-2	131.33	80.00	27.0	14.63	54.5	50.0	5.0	394.00	180.0/40465	198.00	2.480
ESCH-4	131.33	80.00	27.0	14.63	56.5	35.0	5.0	394.00	123.0/27651	150.0	2.310
ESCH-5	133.33	70.00	27.0	14.63	55.0	40.0	5.0	400.00	180.0/40465	198.00	2.450
ESCH-6	133.33	70.00	27.0	14.63	56.5	35	5.0	400.00	127.4/28640	140.1	2.380
ESCH-7	133.33	80.00	27.0	24.00	54.5	50.0	5.0	400.00	180.0/40465	198.0	3.530
ESCH-8	133.33	75.00	25.4	14.63	54.2	35	5.0	400.00	123/27651	135.3	2.160
ESCH-9	133.33	76.20	27.0	14.63	55.0	40	5.0	400.00	180/40465	198.0	2.500
ESCH-10	133.33	39.37	33.7	22.00	70.0	60	7.0/6.0	400.00	350/78683	385.0	4.776
ESCH-11	133.33	39.37	33.7	16.00	65.0	50	5.0	400.00	170/38217	187.0	3.360
ESCH-12	131.33	76.20	23.6	12.70	52.0	35	5.0	394.00	90/20232	99.0	2.050
ESCH-13	131.33	76.20	23.6	12.70	52.0	35	5.0	394.00	90/20232	99.0	2.050
ESCH-14	131.33	76.20	23.6	15.00	52.0	35	5.0	394.00	123/27651	135.3	2.200
ESCH-15	131.33	76.20	23.6	15.00	52.0	35	5.0	394.00	123/27651	135.3	2.200
ESCH-16	135.47	76.20	23.6	12.7/15	54.2	35	5.0	406.40	90/20232	99.0	2.050