



控制柜

MCP-STC 2300 Integrated Full Serial VVVF Control Cabinet



控制柜

MCP-SWF 8620 B Type Integrated Full Serial VVVF MRL Control Cabinet



AS380 一体化控制器
Elevator Integrated Drive and Controller



NICE3000 一体化控制器
NICE3000 Integrated Drive and Controller



DT-2 轿顶检修箱
Top Inspection Box



DT-2 底坑检修箱
Pit Inspection Box

波纹电阻器 (RESISTOR)

Braking Resistor



功率范围(Power Range): 30W~3500W

● 产品识别码(Product Identification Code):


1000W 50R J

阻值误差(Resistance Tolerance)*
产品阻值(Resistance Value)
产品功率(Power Range)

本波纹电阻器采用陶瓷管作为骨架，用制成成波纹状合金电阻丝均匀的绕制在骨架上，表面涂有耐高温绝缘漆料，安装方便，具有良好散热能力，可用于变频器制动，伺服系统，电源等电气回路。

RESISTOR: ceramic tubes used as a skeleton, used to produce alloy resistance wire wavy uniform around the skeleton system, coated with high temperature insulation coatings, ease of installation, with Good heat dissipation capacity inverter can be used for braking, servo systems, such as electrical power circuit.

● 产品外观图(Product Outline Drawing):

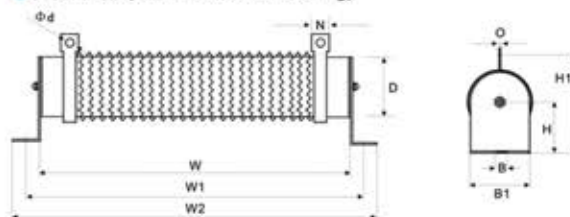

● 产品尺寸表(Product Size):

功率 Power (W)	尺寸 / Size (unit:mm)											参考重量 Weight (Kg)
	W (±2)	W1 (±5)	W2 (±3)	D (±2)	B	B1	H	H1 (±3)	N	φd	O	
50	90	124	146	28	6.5	28	28	61	10	4.5	1.2	0.3
60	90	124	146	28	6.5	28	28	61	10	4.5	1.2	0.3
80	140	174	196	28	6.5	28	28	61	10	4.5	1.2	0.32
100	170	204	226	28	6.5	28	28	61	10	4.5	1.2	0.35
120	170	204	226	28	6.5	28	28	61	10	4.5	1.2	0.35
150	180	217	239	40	8	40	41	81	12	5.5	2.0	0.5
200	180	217	239	40	8	40	41	81	12	5.5	2.0	0.5
300	267	304	326	40	8	40	41	81	12	5.5	2.0	0.7
400	267	304	326	40	8	40	41	81	12	5.5	2.0	0.7
500	316	338	360	50	8	50	45	101	16	6	2.0	1
600	330	367	389	40	8	40	41	81	12	5.5	2.0	0.9
750	316	338	360	50	8	50	45	101	16	6	2.0	1
1000	300	325	350	60	8.5	60	60	119	16	6	2.0	1.36
1200	415	440	465	60	8.5	60	60	119	16	6	2.0	1.68
1500	415	440	465	60	8.5	60	60	119	16	6	2.0	1.68
2000	510	535	560	60	8.5	60	60	119	16	6	2.0	2.12
2500	600	625	650	60	8.5	60	60	119	16	6	2.0	2.46

*电阻阻值误差: K=±10%, J=±5%